

ALTAIR® ACUSOLVE® ON 5TH GEN AMD EPYC™ PROCESSORS COMPUTATIONAL FLUID DYNAMICS

Powered by 5th Gen AMD EPYC™ Processors

October 2024


AT A GLANCE

Dual-socket systems powered by 32-core and 64-core 4th and 5th Gen AMD EPYC™ processors demonstrate outstanding competitive and generational performance uplifts on Altair® AcuSolve® versus 5th Gen Intel® Xeon® Platinum systems.¹


PERFORMANCE HIGHLIGHTS

2P 32-core 4th Gen AMD EPYC 9374F and 5th Gen AMD EPYC 9375F servers delivered performance uplifts of ~1.43x and ~1.82x versus a 2P system powered by 5th Gen 32-core Intel Xeon Platinum 8562Y+ CPUs, respectively, on the Altair AcuSolve acus-f1 benchmark. Also, 2P 64-core 4th Gen AMD EPYC 9554 and 5th Gen AMD EPYC 9575F systems delivered uplifts of ~1.23x and ~1.62x versus a 2P system powered by 5th Gen 32-core Intel Xeon Platinum 8562Y+ CPUs, respectively, on the same benchmark.

RELATIVE ALTAIR ACUSOLVE PERFORMANCE
(2P 32-CORE SYSTEMS)

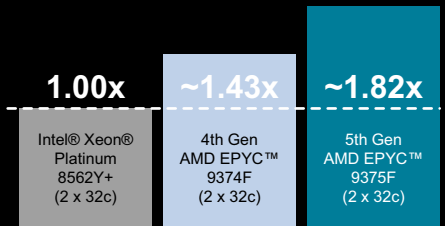

RELATIVE ALTAIR ACUSOLVE PERFORMANCE
(2P 64-CORE SYSTEMS)

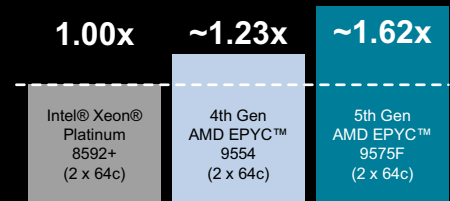

KEY TAKEAWAYS

2P 32- and 64-core 4th and 5th Gen AMD EPYC systems deliver superb performance uplifts compared to 2P servers powered by 32- and 64-core 5th Gen Intel Xeon Platinum CPUs. For example, the 32-core 5th Gen AMD EPYC 9375F system delivered a ~1.82x uplift on the acus-f1 test case, and the 64-core AMD EPYC 9575F system delivered a ~1.62x uplift on the same test case. The 32-core 4th Gen AMD EPYC 9374F system delivered a ~1.43x uplift and the 64-core 4th Gen AMD EPYC 9554 system delivered a ~1.23x uplift on the same test case.

5th Gen AMD EPYC processors are available in 1P and 2P configurations and feature:

- Up to 128 “Zen 5” or 192 “Zen5c” cores.
- Up to 512 MB L3 cache in “Zen 5” AMD EPYC processors.
- Up to 4 links of Gen 3 Infinity Fabric™ at up to 32 Gbps.
- 12 memory channels that support up to 9 TB of DDR5-6000 memory.
- Support for PCIe® Gen 5 at up to 32 Gbps.
- AVX-512 instruction support for enhanced HPC and ML performance.
- AMD Infinity Guard technology to defend your data.²

IN THIS BRIEF

- AMD EPYC 9005 Processors **Page 2**
- System Configuration..... **Page 2**
- Test Methodology..... **Page 3**
- For Additional Information **Page 3**
- References **Page 3**

AMD EPYC 9005 PROCESSORS

5th Gen AMD EPYC processors are the newest generation of the powerful and efficient AMD EPYC processor family for servers that have set hundreds of [world records](#) for performance and efficiency. The AMD EPYC 9005 processor family is built on the breakthrough high performance, highly efficient “Zen 5” processor core architecture and advanced microprocessor process technologies to better meet the needs of the modern AI-enabled data center. The complete line of 5th Gen AMD EPYC processor offerings include a wide range of core counts (up to 192 cores and 384 threads per processor), max boost frequencies up to 5 GHz³, generous L3 cache capacities, high energy efficiency, and competitive cost points. These cutting-edge technologies and features are all backed by the familiar x86 software compatibility that allows servers powered by AMD EPYC 9005 processors to readily support almost any business need.

SYSTEM CONFIGURATION

AMD SYSTEM CONFIGURATION				
CPU(s)	2 x AMD EPYC 9374F	2 x AMD EPYC 9375F	2 x AMD EPYC 9554	2 x AMD EPYC 9575F
Frequency: Base Boost ³	3.85 GHz 4.30 GHz (up to)	3.80 GHz 4.80 GHz (up to)	3.10 GHz 3.75 GHz (up to)	3.30 GHz 5.00 GHz (up to)
Cores	32 cores/socket (64 threads)		64 cores/socket (128 threads)	
L3 Cache	256 MB per CPU			
Memory	1.5 TB (24 x 64 GB DDR5 4800)	1.5 TB (24 x 64 GB DDR5 6000)	1.5 TB (24 x 64 GB DDR5 4800)	1.5 TB (24 x 64 GB DDR5 6000)
Storage	Samsung MZQL21T9HCJR-00A07			
BIOS Version	RTI1009C	RVOT1000A1	RTI1009C	RVOT1000C
BIOS Settings	SMT=OFF; NPS=4; Determinism=Power			
OS	RHEL 9.4.5 (kernel 5.14.0-427.16.1.el9_4.x86_64)			
OS Settings	amd_iommu=on, iommu=pt, mitigations=off			
Runtime Tunings	cpupower idle-set -d 2, cpupower frequency-set -g performance, echo 3 > /proc/sys/vm/drop_caches, echo 0 > /proc/sys/kernel/nmi_watchdog, echo 0 > /proc/sys/kernel/numa_balancing, echo 0 > /proc/sys/kernel/randomize_va_space, echo 'always' > /sys/kernel/mm/transparent_hugepage/enabled, echo 'always' > /sys/kernel/mm/transparent_hugepage/defrag			

Table 1: AMD system configurations

INTEL SYSTEM CONFIGURATION		
CPU(s)	2 x Intel Xeon Platinum 8562Y+	2 x Intel Xeon Platinum 8592+
Frequency: Base Boost	2.80 GHz 4.10 GHz (up to)	1.90 GHz 3.90 GHz (up to)
Cores	32 cores per socket (64 threads)	64 cores per socket (128 threads)
L3 Cache	60 MB per CPU	320 MB per CPU
Memory	1.0 TB (16 x 64 GB DDR5 5600)	
Storage: OS Data	Kioxia KCMYXRUG3T84	
BIOS Version	ESE122V-3.10	
BIOS Settings	SMT=OFF; High Performance Mode	
OS	RHEL 9.4.5 (kernel 5.14.0-427.16.1.el9_4.x86_64)	
OS Settings	processor.max_cstate=1, intel_idle.max_cstate=0, iommu=pt, mitigations=off	
Runtime Tunings	cpupower frequency-set -g performance, echo 3 > /proc/sys/vm/drop_caches, echo 0 > /proc/sys/kernel/nmi_watchdog, echo 0 > /proc/sys/kernel/numa_balancing, echo 0 > /proc/sys/kernel/randomize_va_space, echo 'always' > /sys/kernel/mm/transparent_hugepage/enabled, echo 'always' > /sys/kernel/mm/transparent_hugepage/defrag	

Table 2: Intel system configurations

TEST METHODOLOGY

The Altair AcuSolve acus-f1 benchmark represents a typical usage scenario. The uplift is calculated as the ratio of the systems under test (*sut*) to the reference systems (*ref*). In this Performance Brief, the Intel Xeon Platinum 8562Y+ and Intel Xeon 8592+ processors are the *ref* systems, and the AMD EPYC processors are the *sut*. The AMD EPYC processors tested include the 4th and 5th Gen AMD EPYC processors listed in Table 1, above. All systems tested were configured as shown in Tables 1 and 2, above.

FOR ADDITIONAL INFORMATION

Please see the following additional resources for more information about 5th Gen AMD EPYC features, architecture, and available models:

- [AMD EPYC™ Processors](#)
- [AMD Documentation Hub](#)

REFERENCES

1. See <https://altair.com/altair-cfd-capabilities#ns>.*
2. AMD Infinity Guard features vary by EPYC™ Processor generations and/or series. Infinity Guard security features must be enabled by server OEMs and/or Cloud Service Providers to operate. Check with your OEM or provider to confirm support of these features. Learn more about Infinity Guard at <http://www.amd.com/en/products/processors/server/epyc/infinity-guard.html>. GD-183A
3. Maximum boost for AMD EPYC processors is the maximum frequency achievable by any single core on the processor under normal operating conditions for server systems. EPYC-18

AUTHORS

Michael Senizaiz and Wilmer Finollnciarte contributed to this Performance Brief.

RELATED LINKS

- [Altair®*](#)
- [Altair® AcuSolve®*](#)
- [AMD EPYC™ Processors](#)
- [AMD Documentation Hub](#)

**Links to third party sites are provided for convenience and unless explicitly stated, AMD is not responsible for the contents of such linked sites and no endorsement is implied.*

AMD EPYC 9005 FOR TECHNICAL COMPUTING

5th Gen AMD EPYC CPUs deliver excellent per-core performance by taking advantage of fast CPU frequencies, low latency memory, and a unified cache structure. Design engineers can use AMD EPYC processors to perform complex technical computing tasks with ground-breaking high-performance computing and robust security features to deliver excellent results.

“ZEN 5” CORE & SECURITY FEATURES

AMD EPYC 9005 Series Processors support up to:

- 192 physical cores, 384 threads
- Up to 512 MB of L3 cache per CPU
- 32 MB of L3 cache per CCD
- 9 TB of DDR5-6000 memory
- Up to 128 (1P) or 160 (2P) PCIe® Gen 5 lanes

Infinity Guard security features³

- Secure Boot
- Encrypted memory with SME

ALTAIR®

Altair® delivers comprehensive, open-architecture solutions for data analytics & AI, computer-aided engineering, and high-performance computing (HPC) that enable design and optimization for high performance, innovative, and sustainable products and processes in an increasingly connected world.

ALTAIR® ACUSOLVE®

Altair® AcuSolve® is a proven asset for companies looking to explore designs by applying a full range of flow, heat transfer, turbulence, and non-Newtonian material analysis capabilities without the difficulties associated with traditional CFD applications.

DISCLAIMERS

The information contained herein is for informational purposes only and is subject to change without notice. While every precaution has been taken in the preparation of this document, it may contain technical inaccuracies, omissions and typographical errors, and AMD is under no obligation to update or otherwise correct this information. Advanced Micro Devices, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this document, and assumes no liability of any kind, including the implied warranties of noninfringement, merchantability or fitness for particular purposes, with respect to the operation or use of AMD hardware, software or other products described herein. No license, including implied or arising by estoppel, to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of AMD products are as set forth in a signed agreement between the parties or in AMD's Standard Terms and Conditions of Sale. GD-18u

COPYRIGHT NOTICE

©2024 Advanced Micro Devices, Inc. All rights reserved. AMD, the AMD logo, EPYC, and combinations thereof are trademarks of Advanced Micro Devices. Altair, the Altair logo, and AcuSolve are trademarks or registered trademarks, of Altair. Red Hat is a trademark or registered trademark of Red Hat, Inc. PCIe is a registered trademark of PCI-SIG Corporation. Other product names used in this publication are for identification purposes only and may be trademarks of their respective owners. Certain AMD technologies may require third-party enablement or activation. Supported features may vary by operating system. Please confirm with the system manufacturer for specific features. No technology or product can be completely secure.